BOSCH
Invented for life

Address Cards

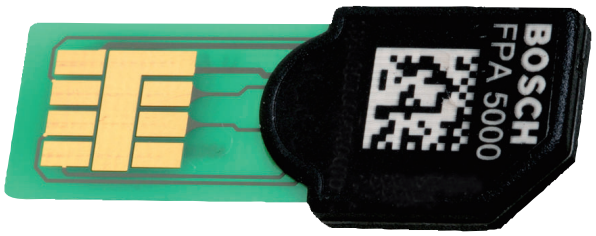

- **Up to 64, 128, 512, 1024 or 2048 addresses on one card**
- **Up to four cards in one control panel**

A control panel can be equipped with up to four optional Address Cards each containing 64, 128, 512, 1024 or 2048 addresses depending on requirements.

System Overview

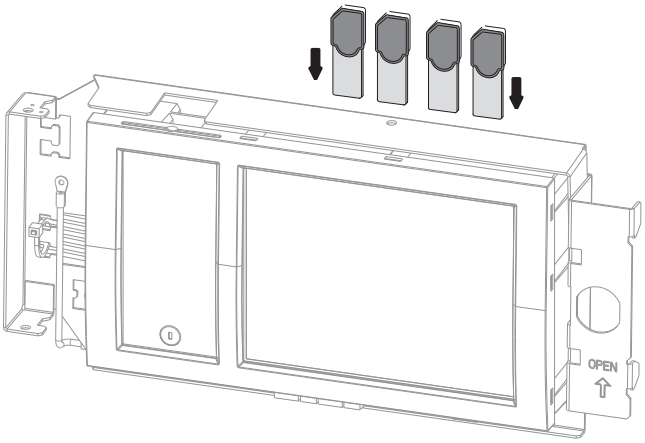

Installation/Configuration Notes

- The Address Cards activate detection points. The FPA-5000 governs up to 4096 detection points.
- Each element and input which, after the programming, is able to set off an alarm requires a detection point. Inputs are considered as detection points if they are programmed accordingly in the FSP-5000-RPS Programming Software.
- Detection points are required for:
  - manual call points and automatic detectors
  - inputs of LSN elements
  - inputs of functional modules
- Signaling devices and outputs have no detection points!
- Examples for required detection points:
  - The CZM 0004 A 4 Zone Conventional Module is allocated to 4 detection points, one per zone.
  - The IOP 0008 A Input/Output Module is allocated to up to 8 detection points, one for every single supervised input.